
INSTRUCTIONS SIDE UNDER SP P/N 08F04-TB. ARTS LIST off spoiler	A-100 Illustratio	2016 CIVIC 4-DOOR	Issue Date OCT 2015 poilers on the Vehic
ft spoiler			poilers on the Vehic
	RIG	GHT SPOILER	
ght spoiler		1 1000	1
			LEFT SPOILER
Seals	-	Contraction of the second	QE32435B
	INSTALLA	ATION	4692499D
DOL AND SUPPLIES REQUIRED hillips screwdriver ubby Phillips screwdriver the following tool is available through the Honda Tool and quipment Program. On the iN, click on: Service > ervice Bay > Tool and Equipment Program, then ente e number under "Search." Or, call 888-424-6857. Plastic Trim Tool (T/N SILTRIMTL10)	nstallatio technician training to vehicle. T "do-it-you NOTE: • These in The sar spoiler.	er Information: The information instruction is intended ns who have the proper o correctly and safely a These procedures shoul inselfers."	d for use only by skille tools, equipment, ar dd equipment to you d not be attempted b t spoiler being installe o installing the right

Installing the Spoilers


1. Turn the steering wheel fully counterclockwise.



4. Remove the four clips from the left side sill trim.




5. Open the left front and rear doors.




QE32423AH

6. Remove the left side sill trim.




3. Remove the two self-tapping screws from the left rear inner fender.




2 SELF-TAPPING SCREWS

QE32421AH

7. Close the left front and rear doors.




- 8. Remove the 11 clips from vehicle panel.
- 9. Remove and replace all 11 clip seals.




QE32425BH


10. Remove three spring nuts from the left side sill trim.



11. Install the three spring nuts on the side under spoiler as shown.




12. Install 11 clips on the left spoiler.




13. Install the left spoiler on the vehicle panel.

VEHICLE PANEL




QE32431BH

14. Attach the left spoiler to the vehicle panel with four clips.




QE32432BH

15. Secure the front of the left spoiler with two self-tapping screws.



16. Secure the back of the left spoiler with two self-tapping screws.

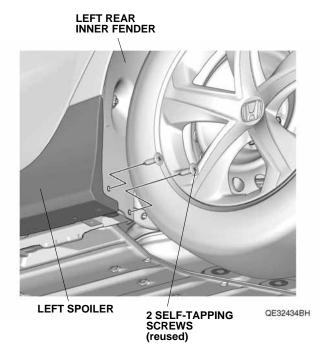

17. Turn the steering wheel fully clockwise and repeat steps 2 through 16 on the right side of the vehicle.